

HIGH TEMPERATURE POLYMER FILTRATION MEDIUM

FIELD OF THE INVENTION

The present invention relates to a high temperature polymer resin for use as a stiffening agent for a filtering medium. More specifically, a polyimide treated pleated filter medium for use in a high temperature industrial particulate filter apparatus is disclosed.

BACKGROUND OF THE INVENTION

A technique for controlling pollutants and emissions from industrial plants is to remove undesirable particulate matter carried in a gas stream by fabric filtration. Such fabric filtration is accomplished in a particulate matter or dust collection apparatus known in the industry as a "baghouse". The fabric filter is preferably pleated to increase the effective filtering area while occupying the same or less space. The improved baghouse illustrated herein includes two large chambers, or plenums, that are divided by a tube sheet having a plurality of openings for receiving air filter cartridges.

The filter cartridges include a pleated filter medium that retains the unwanted particles as the air is forced through the cartridge. Traditional dust filtration materials are made from woven or needlepunch media. Newer filters, including higher surface area pleated media, are made from spunbond or other nonwoven media. The effectiveness of the filters diminishes as particles collect on the outer surfaces of the filters, thereby diminishing air flow. To remove accumulated particles on the filters without physically removing the filters from the baghouse, air may be pulsed through the baghouse cartridge filters from the opposite direction of air flow during particulate removal. The reverse

pulses abruptly and temporarily expand the filter media to dislodge the particles, which fall to the bottom of the baghouse and are removed. The effectiveness of the baghouse is greatly increased without having to repeatedly remove and replace the cartridges

Unfortunately, there are limitations associated with the use of pleated filter media. First, the pleated structure is sensitive to temperature. Complications arise when these media are being processed and manufactured at temperatures similar to the temperatures used in the baghouse during filtering applications. The higher temperature causes the media to soften, allowing a level of pleat collapse or pleat pinch to occur. Pleat collapse can restrict air flow and cause increased pressure drop minimizing the advantages of the higher filter surface area of the pleats. For this reason, the use of polymer filter media for use at higher temperatures has been limited. (For purposes of this disclosure, high temperature is meant to include but is not limited to filtering applications ranging from about 300° to about 500°F, with surge temperatures typically reaching about 550°F.)

There are several primary fibers or polymers, processed into fabrics and used in the 300° to 550°F range. Traditionally they are polyphenylene sulphide (PPS, with trade names such as Ryton®, Torcon® and Procon®) and aramid (Nomex®, Conex®) both of which operate up to but preferably below 400°F. Applications operating at temperatures greater than 400°F and up to 550°F typically utilize fibers of glass, polyimide (P84) or PTFE (Teflon®, Profilen®, Rastex®). For this reason the selection of the substrate fiber or resin is in part determined by the conditions under which the filter will be used.

Second, the abrupt expansions from reverse pulse cleaning procedure places additional stress on the filter media. The stress results in cracking of the resin or

stiffening agent, discussed below, thereby shortening the effective filter life. As the tensile and tear strength of the stiffening agent are lessened, the media tend to crack, split and/or tear, leading to the escape of unfiltered emissions through the tears. Thus, the combination of stresses due to the inward filtering flow and outward cleaning pulses reduce the effective filter life typically to six months or less when operated twenty four hours/seven days a week at a temperature of 350°F to 400°F.

Conventional polymer filtering materials, including PPS based filtering material, has heretofore been treated with stiffening agent resin systems applied in a secondary process. The stiffening resins impregnate the substrate to strengthen and stabilize the filter, as well as aiding in pleating and pleat retention. These known stiffening resins include emulsions and/or dispersions of bisphenol based epoxies, acrylic based resins, melamine and phenol formaldehyde resins. These resins are commonly used in the textile industry and are recommended for use with textile products exposed to high temperatures. They are applied to impart the necessary features to allow the media to pleat and retain its form and shape at the desired application temperatures. The resins are typically applied via an impregnation process, where the media is totally immersed in a bath of the specified resin solution and then nip squeezed to remove the excess solution prior to drying. After drying the media is rendered stiff. The media is measured to ensure the correct level of resin has been applied, typically 10% to 25% add on to the basis weight of the base or substrate medium.

These conventional resins are not fully cross-linked or cured when initially dried onto the fabric. This allows the media to re-soften during subsequent high temperature processes, specifically the pleating process, where the softening allows the fabric to

conform to the pleating action. After subsequent cooling the resin helps maintain the pleat structure. Unfortunately, upon initial exposure to elevated temperatures during filtering applications the media softens, and does not fully cure and re-stiffen for up to several hours. Once fully cured, the fabric is better able to withstand the rigors of reverse air pulsing, at low temperatures, without losing shape and form. However, pleat collapse or pinching can occur while the material is soft prior to curing. These resins that cure in two stages are called "B" staged resins. The initial drying and partial curing is commonly known as "B-curing", followed by a complete or final curing.

While these stiffening agent resins render the treated filter fabric pleatable, conventional resins cannot withstand the mechanical wear and rigors of reverse air pulse cleaning, as these resins tend to crack. Commercially available filter media typically have a life expectancy, dependent on conditions, of about six months, due to the thermal and mechanical wear on the stiffening resin.

It is therefore desirable to provide a polymer stiffening agent capable of withstanding the temperature and cleaning pulses of high temperature industrial baghouses, and to provide a pleated filter medium utilizing the improved polymer stiffening agent

SUMMARY OF THE INVENTION

The present invention is directed to an improved polymer stiffening resin for use with a filtering medium. The stiffening resins of the present invention are polyimide (PI) based resins. Polyimides are a generic class of condensation polymers containing an 'imide' linkage as a linear or heterocyclic unit along the polymer backbone.

In a preferred embodiment the polyimide stiffening resins are applied to woven and non-woven polymer substrates to form pleated filter media. The non-woven substrates are calendered, and both types of substrates are immersion coated with the polyimide stiffening resin. The improved filter media of the present invention are especially well suited for use in applications at temperatures exceeding 300°F, such as industrial baghouse filtering applications.

The present invention is also directed to a method of making the filter medium of the present invention. A preferred method comprises calendering a substrate; treating the calendered substrate with a polyimide stiffening agent; and curing the treated substrate.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic view, partly in section, of a baghouse shown with filter assemblies containing the improved pleated filter medium of the present invention installed.

FIG. 2 is a perspective, enlarged sectional view of the filter assembly illustrated in FIG. 1.

FIG. 3 is an elevational view of the filter assembly of FIG. 2.

FIG. 4 is a cross-sectional view of the filter assembly of FIG. 3 taken along line 4-4 of FIG. 3.

FIG. 5 is an SEM (scanning electron microscope) photograph of a non-woven aramid polymer substrate treated with the preferred polyimide stiffening resin of the present invention.

FIG. 6 is an SEM photograph of a non-woven PPS/polyimide polymer substrate treated with the preferred polyimide stiffening resin of the present invention.

FIG. 7 is a graph entitled "Combined Average MD and XMD Retained Tensile Strength of PAI Resin Treated Aramid versus Epoxy Resin Treated Aramid"

FIG. 8 is a graph entitled "Combined Average MD and XMD Retained Tear Strength of PAI Resin Treated Aramid versus Epoxy Resin Treated Aramid"

DETAILED DESCRIPTION

An improved adapted for using the pleated filter media of the present invention is shown in FIG. 1, and is disclosed in U.S. Patent No. 6,203,591 B1 to J.T. Clements et al., incorporated herein by reference. This baghouse is for purposes of illustration only, and is not meant to limit the use of the present invention to this particular baghouse. The baghouse, generally designated 10, is defined by an enclosed housing 12 that is divided into a "dirty air" plenum 14 and a "clean air" plenum 16 by a tubesheet 18. A dirty air inlet port 20 is in fluid communication with the dirty air plenum 14 and a clean air outlet port 22 is in fluid communication with clean air plenum 16. The tubesheet 18 includes a plurality of openings 24 sized to accept and retain a plurality of filter assemblies generally designated 26, as shown.

A filter cartridge 26 adapted for use with the present invention is illustrated in FIGS. 2-4. The filter cartridge 26 includes a fabric filter 28 that is generally tubular and includes a number of pleats 30. The pleats have an inner surface 32 and an outer surface 34. In a preferred embodiment, pleats 30 abut an inner screen 36 defining a central passageway 38 formed within filter cartridge 26. The fabric filter 28 and screen 36 are

aligned and held in place by an upper cap 40 and a lower cap 42. Upper cap 40 includes a projecting shoulder 44 that holds the cartridge in place against tubesheet 18 and prevents the cartridges from falling through openings 24. The assembly 26 is further strengthened by a fabric strap 46, described in more detail in U.S. Patent No. 6,233,790 B1 incorporated herein by reference.

In operation, the dirty air enters dirty air plenum 14 through inlet port 20 and is filtered through the filter assemblies 26. As the air moves through the filter media 28 into the central passageway 38 particles are trapped against outer surface 34. The cleaned air then exits passageway 38 into the clean air plenum 16 and is removed from baghouse 10 through outlet port 22, as shown by the arrows in Fig.1. As the filtered particles build up against the outer surface 34 of filter 28, the efficiency of baghouse 10 decreases. In order to remove the particles, air is pulsed in the reverse direction of airflow during the filtering application. Air is pulsed at a desired rate to maintain the desired airflow during filtering application. The reverse pulse "blows" the particles off the outer surface 34 of filter 28. The particles fall to the bottom of dirty air plenum 14 and can be removed.

While the illustrated baghouse, cartridge and strap are preferred, it is understood that any suitable baghouse, cartridge and/or strap design may be utilized with the present invention. Further, the filter medium described below can be used in other filtering configurations.

The filter media of the present invention is comprised of a substrate, for example a polymer needlefelt medium, that has been impregnated with a polyimide resin stiffening agent. The polyimide stiffening resin provides increased fiber strength and stabilization for pleat retention and structural integrity during filtering and pulse cleaning, especially

when used in higher temperature applications.


The stiffening resins of the present invention are polyimide (PI) based resins. Polyimides are a generic class of condensation polymers derived from bifunctional carboxylic acid anhydrides and primary diamines. They contain an 'imide' linkage, $-\text{CO}-\text{NR}-\text{CO}-$, as a linear or heterocyclic unit along the polymer backbone. The heterocyclic structure is usually present as a five or six membered ring condensed with benzene (phthalimides) or naphthalene (naphthalimides).

Polyimides include but are not limited to the generic classes of polyamideimides (PAI), polyetherimides (PEI) and polybismaleimides (PBMI). PAI's are high performance polymers containing both the 'imide' linkage and 'amidine' ($-\text{CO}-\text{NH}-$) linkages in the polymer backbone. PAI resins are produced by solution condensation of aromatic trichlorides with aromatic diamines. PEI's are condensation polymers produced from reactions of bisphenols and dinitrobisimides. PEI polymers contain both the 'imide' and 'ether' ($-\text{O}-$) linkages in the polymer backbone. The ether linkage improves ease of processing and flexibility. PBMI's are generally prepared from the two-step reaction of maleic anhydride and diamines in the presence of acetic anhydride and catalytic amounts of nickel acetates and triethylamine. Polyimides include both thermoset and thermoplastic polymers that can be 'engineered' to suit specific end-use performance requirements.

Compared with conventional resins they are significantly more expensive, but do offer the required increased thermal resistance properties necessary for withstanding temperatures ranging from 500°F up to 700°F. Further, the glass transition temperatures (T_g 's) of these resins/polymers are greater than the maximum operating temperature in an

industrial baghouse which is typically 500°F. These resins are known to retain good structural integrity while operating at higher temperatures for extended periods of exposure while maintaining the required chemical resistance and tensile strength needed. In addition, these resins have excellent resistance to stretch or creep at elevated temperatures and are extremely flame retardant. Polyimides are available as both organic or water based solutions.

A class of polyimide, PAI is discussed for purposes of illustration but is in no means meant to be limiting. A preferred PAI resin is formulated by the following reaction pathway:

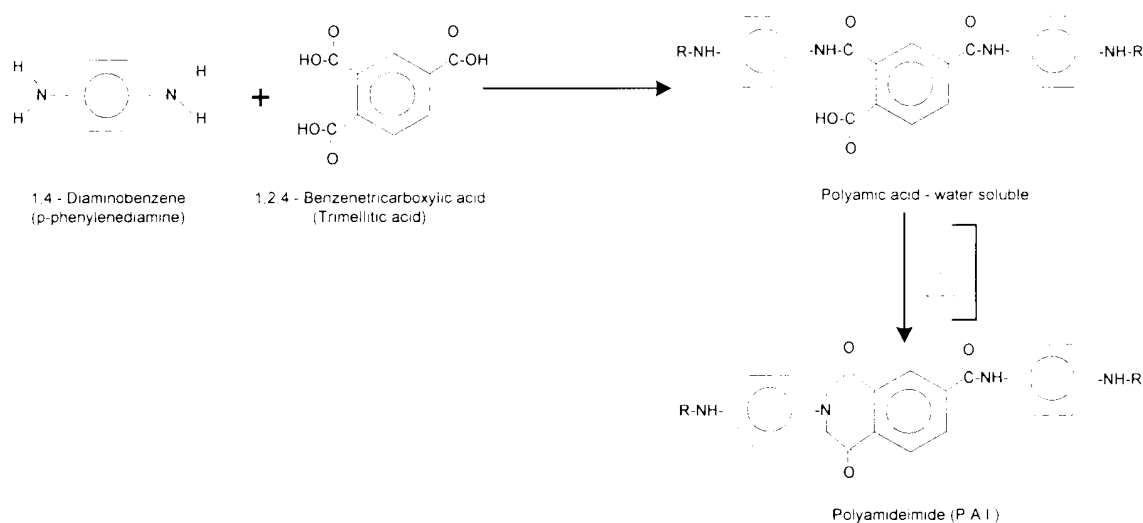

The preferred PAI shown above is a thermoplastic polymer with a Tg of 540°F. It is flame resistant, with an LOI (limiting oxygen index) of 45%, has low smoke generation and is primarily a water-base system. Although there is a small quantity of solvent found in this PAI formulation, it does not need special processing equipment. Traditional nonwoven wet chemical processing equipment to control ventilation and exhaust is adequate, and special solvent recovery systems are not necessary. This helps to hold

down the cost of using these types of resins, allowing these resins to be processed by existing media vendors and afforded by the dust pollution control industry.

The polyimide stiffening agent of the present invention may be utilized in combination with any substrate capable of withstanding the conditions of the particular filtering application. In high temperature applications, acceptable polymer substrates include but are not limited to polyarylene sulfides, polyimides, aramids, polyamides, glass and mixtures or blends thereof. A substrate that is particularly well suited for high temperature applications is a blend of polyphenylene sulfide (PPS), which is a subclass polyarylene sulfides, with greater than 10% aramid, polyimide, acrylic, pre-oxidized acrylic or similar polymer, and mixtures thereof. These blends are the subject of co-pending application _____, common assignee of the present invention, incorporated herein by reference.

Another suitable substrate is an aramid fiber medium. Commercially available aramid based products are most often made from 100% aramid fiber needlefelts that are resin stiffened with conventional resins as is disclosed above. Aramid polymers and blends thereof are generally selected when a high temperature gas stream needs to be cleaned with temperatures in the range of 300 °F to 400 °F.

A 2% to 20% weight pick up of the polyimide resin is preferred, with 6% to 10% more preferred. Most preferred is a 6% to 7% weight pick up of the preferred PAI on the polymer needlefelt media, which is sufficient to allow pleating and pleat retention. This improves over conventional stiffening agents, available as emulsions and dispersions, that require 10% to 25% weight pick up to achieve the same stiffness. The reduction in the weight pick up required by the polyimide resins provides a superior stiffening agent and

renders the polyimide resins more economical.

The polyimide resins provide sufficient stiffness at lower weight pick ups primarily due the following: First, the polyimide resin is in solution, rather than an emulsion or dispersion. This allows a thinner, more uniform impregnation of the substrate with the polyimide resin.

Second, the polymer needlefelt is calendered under heat and pressure to attain the thickness and air permeability properties needed from the final filter media. In a preferred embodiment the media is calendered after singeing but prior to application of the stiffening resin to prevent cracking of the stiffening resin. Calendering the substrate prior to application of the stiffening agent contributes to the uniformity of stiffening resin at lower weights than are required with traditional stiffening resins.

The polyimide resin may be applied to the substrate by immersion coating. The substrate is fed into a coating tank and dip coated in the resin solution to impregnate both sides of the substrate. The media passes between two nip rolls to remove the excess and enters a drying oven where the polyimide resin is substantially cured.

A further advantage of the polyimide resin is the fact that it is available in a solution, rather than an emulsion or dispersion such as the prior art resin. In the prior art, the emulsion or dispersion that is removed by the nip rolls during the immersion coating process is diluted, as the resin is trapped in the substrate. Since the polyimide resin is in solution, the solution maintains a constant concentration.

In the preferred embodiment the treated substrate is then pleated by any suitable method, including a blade or push bar pleater. Due to the higher Tg of polyimides, the temperature during pleated is raised to approximately 430°F dependent on the particular

polyimide used, as is well known in the art.

In an alternate embodiment, these types of media can be laminated with expanded microporous PTFE, as is known in the art, to impart an improved level of filtration performance to the woven or non-woven filter medium. This requires a level of further processing to allow the media to bond to the PTFE membrane. In another alternate embodiment the polymer substrate may be formed around a support scrim, such as PTFE. Both of these processes are well known in the art

Example 1

A 10.0 oz unsupported aramid (Nomex) media, supplied by Southern Felt Co. of North Augusta, SC was produced by known methods. The fibers were processed into a felt and both sides were singed and calendered by conventional methods prior to resin application. The 2376 PAI resin solution was supplied by Whitford Inc., West Chester, PA at 11.0% solids, 10% NMP and 79% water and additional trace components including surfactants. The 2376 resin solution was diluted to 5.5% solids using water at a 1:1 ratio. The felt was immersed in the resin and the excess removed by nip rollers to produce a 6% to 7% pickup after the first pass. The treated media was dried at 425°F and pleated by conventional means, although the temperature was increased to about 430°F on the exit platens due to the high Tg of PAI.

A SEM photo of the aramid substrate treated with the preferred PAI is shown in FIG. 5. It is apparent that the PAI resin has coated the fibers individually and consistently, as the fiber structure is apparent. For purposes of comparison, an SEM photo of an aramid substrate treated with a conventional epoxy would be expected to illustrate that the epoxy had collected more heavily in the voids between the fibers. The

concentrations of epoxy not associated with a fiber would be easily 'blown' off the filter medium resulting in an immediate drop in stiffness and pleat stability.

The PAI treated aramid filter was tested in a full scale test baghouse under industrial conditions. The test baghouse is fully automated and simulates industrial conditions at a constant temperature, 375° F, 1200cfm (4:1 a/c), 60 psi with dust loading. The pressure drop was constant, ranging between 2.8 and 3.6 inches. The filters were removed at 30,000, 50,000 and 110,000 pulses. The results of these tests are shown in the Table 1. Most notably, the data shows that after 110,000 pulses the media with the preferred resin still had 90% of its original strength. The simulated baghouse testing indicates at 110,000 pulses there is more than 12 months simulated life on these filters. Further, the test data indicates the PAI resin is more stable and suitable at withstanding the forces and temperatures expected of the media and can be extrapolated to suggest it will also be in good condition after 200,000 pulses or the equivalent of two years life while operating on a twenty-four hour/seven day a week basis.

Table 1

ThermoPleat Analysis – BEST Tested Media					
<u>Property</u>	<u>Units</u>	<u>Zero Pulses</u>	<u>30,000 Pulses</u>	<u>50,000 Pulses</u>	<u>110,000 + Pulses</u>
Basis Weight – Dirty Top	oz/sq yd	n/a	12.4	14.9	16.7
Basis Weight – Dirty Bottom	oz/sq yd	n/a	11.6	12.5	12.3
Basis Weight – Clean Top	oz/sq yd	10.5	11.0	11.4	12.7
Basis Weight – Clean Bottom	oz/sq yd	10.5	10.8	11.6	11.8
Thickness – Clean	inches	0.046	0.049	0.055	0.050
Air Perm. Dirty Top	cfm	n/a	4.99	7.1	4.6
Air Perm. Dirty Bottom	cfm	n/a	8.60	12.1	10.4
Air Perm. Clean Top	cfm	29.0	28.5	25.7	20.8
Air Perm. Clean Bottom	cfm	n/a	26.5	20.0	20.0
MD Tensile Strength	lbs/2"	188.5	199.5	181.3	178.0
XMD Tensile Strength	lbs/2"	311.5	314.7	294.0	292.0
MD Elong'n at break	%	57.8	37.2	40.4	29.8
XMD Elong'n at break	%	51.0	42.5	35.1	34.5
MD Tear Strength	lbs	23.0	11.25	11.91	11.8
XMD Tear Strength	lbs	11.0	7.9	7.5	6.9
Retained MD Tensile	%	100	100	96.2	94.4
Retained XMD Tensile	%	100	100	94.4	93.7
Prior Resin Tensile	%	100	50	20	
Retained MD Tear	%	100	49.0	51.8	51.3
Retained XMD Tear	%	100	71.8	68.2	62.8
Prior Resin Tear	%	100	35	10	

The combined average tensile strength and the combined average tear strength of the PAI resin treated aramid substrate as compared to an aramid substrate treated with a conventional epoxy resin is shown in FIGS. 7 and 8, respectively. As is noted, the epoxy resin treated aramid substrate experienced a total filter failure prior to 110,000 pulses.

The improved resin treated aramid was flame tested and compared to conventional stiffening agents. Flammability Testing in accordance with FTMS 191A-Method 5903 is shown in Table 2. As is seen, the PAI treated aramid exhibits excellent flame retardation.

Table 2

Flammability Testing

Testing in accordance with FTMS 191A – Method 5903

	<u>PAI Coated Aramid</u>	<u>PAI Coated PPS/Polyimide</u>
After Flame (secs) MD	0 0	2.6
XMD	0 0	3.4
After Glow (secs) MD	0 0	0.0
XMD	0 0	0.0
Char Length (in) MD	1 8	2.9
XMD	2.0	2.9

An 11.0 oz unsupported filter medium of 75% PPS and 25% polyimide, supplied by Southern Felt Co. of North Augusta, SC, was produced by known methods. The fibers were processed into a felt and both sides were singed and calendered by conventional methods prior to resin application. The 2376 PAI resin was supplied by Whitford Inc., West Chester, PA at 11.0% solids, 10% NMP and 79% water. The 2376 resin solution was diluted to 5.5% solids using water at a 1:1 ratio. The felt was immersed in the resin and the excess removed by nip rollers to produce a 6% to 7% pickup after the first pass. The treated media was dried at 400°F and pleated by conventional means, although the temperature was increased to about 430°F on the exit platens due to the high Tg of PAI.

An SEM photo of the PPS/polyimide substrate treated with the preferred PAI is shown in FIG. 6. It is apparent that the PAI resin has coated the fibers individually and consistently, as the fiber structure is apparent.

The improved resin treated aramid was acid cycling testing, the results are shown in the graph of FIG. 7. Flammability Testing in accordance with FTMS 191A-Method 5903 is shown in Table 2 of FIG. 8.

All flammability testing was accomplished by Textile Technology Centre in St. Hyacinthe, Quebec.

The presently preferred embodiments have been described, however, many variations are possible. As noted above, the polyimide treated polymer substrate filter of the present invention may be advantageously used with the illustrated baghouse, however, the present invention may be used with any suitable baghouse or filtering apparatus. Moreover, although the stiffening resin of the present invention is particularly advantageous when used with a pleated filter medium, the invention is equally applicable to filter media of varying structures and applications, such as woven glass.

The stiffening resin of the present invention has been shown in combination with a non-woven polymer filtering substrate. However, any substrate, woven or non-woven, that satisfies the filtering requirements of the particular filtering application may be used.

While the filtering medium of the present invention overcomes the limitations of high temperature filtering applications, the present invention may also be used in lower temperature applications.

Having described the invention in detail, those skilled in the art will appreciate that modifications may be made of the invention without departing from its spirit and

scope. Therefore, it is not intended that the scope of the invention be limited to the specific embodiments described. Rather, it is intended that the scope of the invention be determined by the appended claims and their equivalents.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237